


Specifications

- Voltage rating: 50V AC, DC
- Current Rating: 1.5A, AC, DC
- Withstand voltage: 500V AC/minute
- Contact resistance: 20m Ω max
- Insulation resistance: 100m Ω min
- Temperature range: -40°C ~ +105°C
- Compliant with RoHS and REACH
- Contact JVT for details

Assembly layout

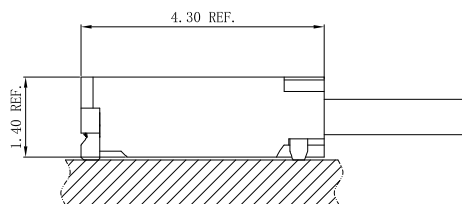

JVT1224 SERIES

1.2mm pitch wire to wire connector

JVT1224H


1.2mm Pitch housing

HOUSING


Part No. : JVT1224HLP-XXBK

Material: LCP UL94V-0

Mates With Part(s) : JVT1224 Terminal

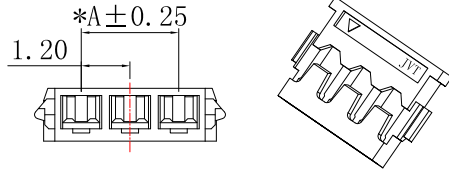


JVT1224HLP-XXBK
Logo —
Series NO. —
Housing —
BK-Black
Pin NO.
LP-LCP UL94V-0

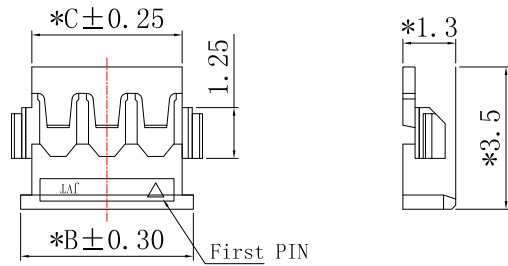

Poles	Dimensions (mm)		
	A	B	C
02	1.20	3.05	2.5
03	2.40	4.25	3.7
04	3.60	5.45	4.9
05	4.80	6.65	6.1

Unit:mm



JVT1224H


1.2mm Pitch housing

HOUSING


Part No. : JVT1224HNO-XXBK

Material: PA66 UL94V-0

Mates With Part(s) : JVT1224 Terminal

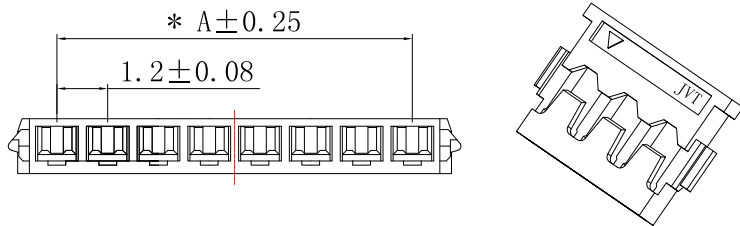


JVT1224HNO-XXBK
Logo —
Series NO. —
Housing —
BK-Black
Pin NO.
NO-PA66 UL94V-0

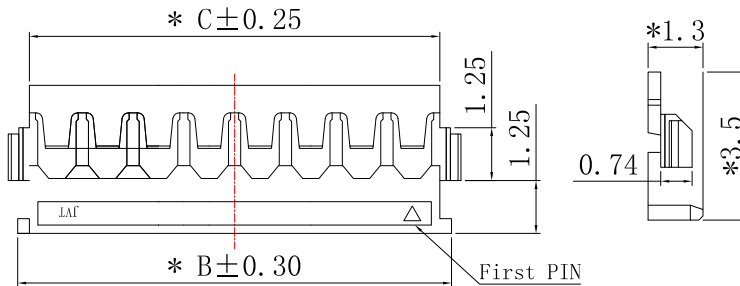

Poles	Dimensions (mm)		
	A	B	C
06	6.00	7.85	7.3
07	7.20	9.05	8.5
08	8.40	10.25	9.7
09	9.60	11.45	10.9
10	10.80	12.65	12.1
11	12.00	13.85	13.3
12	13.20	15.05	14.5
13	14.40	16.25	15.7
14	15.60	17.45	16.9
15	16.80	18.65	18.1
16	18.00	19.85	19.3

Unit:mm

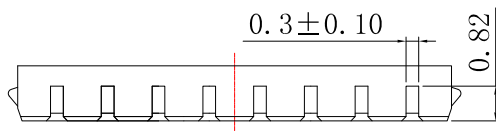


JVT1224 SERIES

1.2mm pitch wire to wire connector

JVT1224T


1.2mm Pitch Crimp Terminal

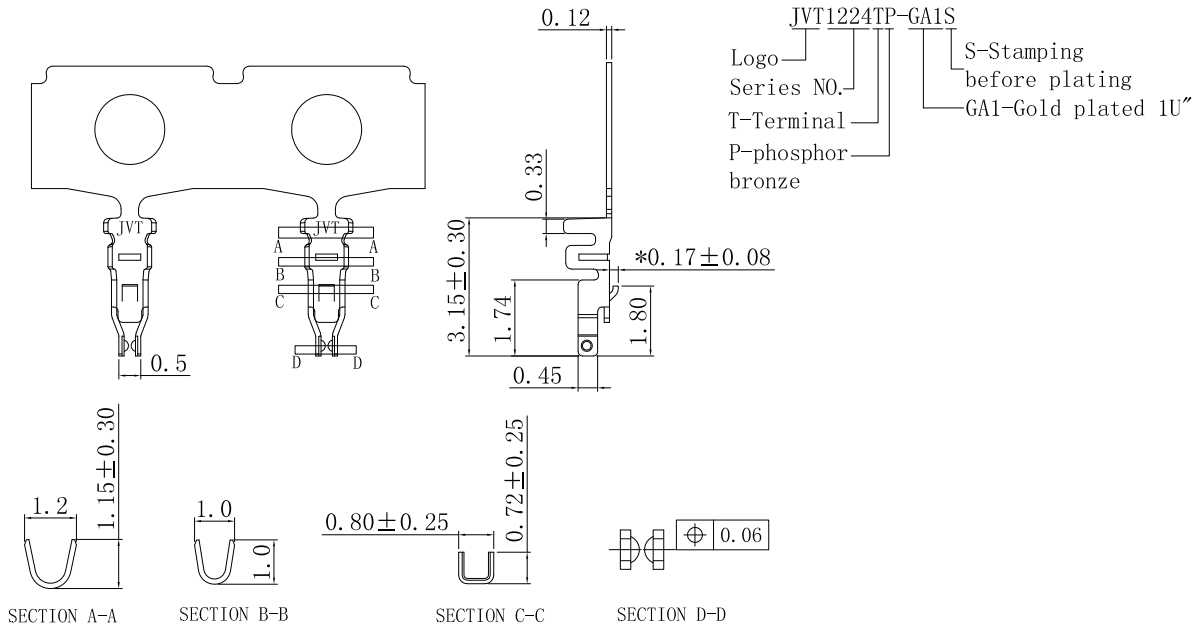

JVT1224TP-GA1S	Phos Bronze	Gold Plated	AWG#28~30	0.7mm(Max)	JVT1224 Housing
PART NO	Material	Finish(Pin)	Wire Range	Insulation O.D.	Mates With Part(s)

JVT1224W

1.2mm Pitch 90° Wafer-SMT TYPE

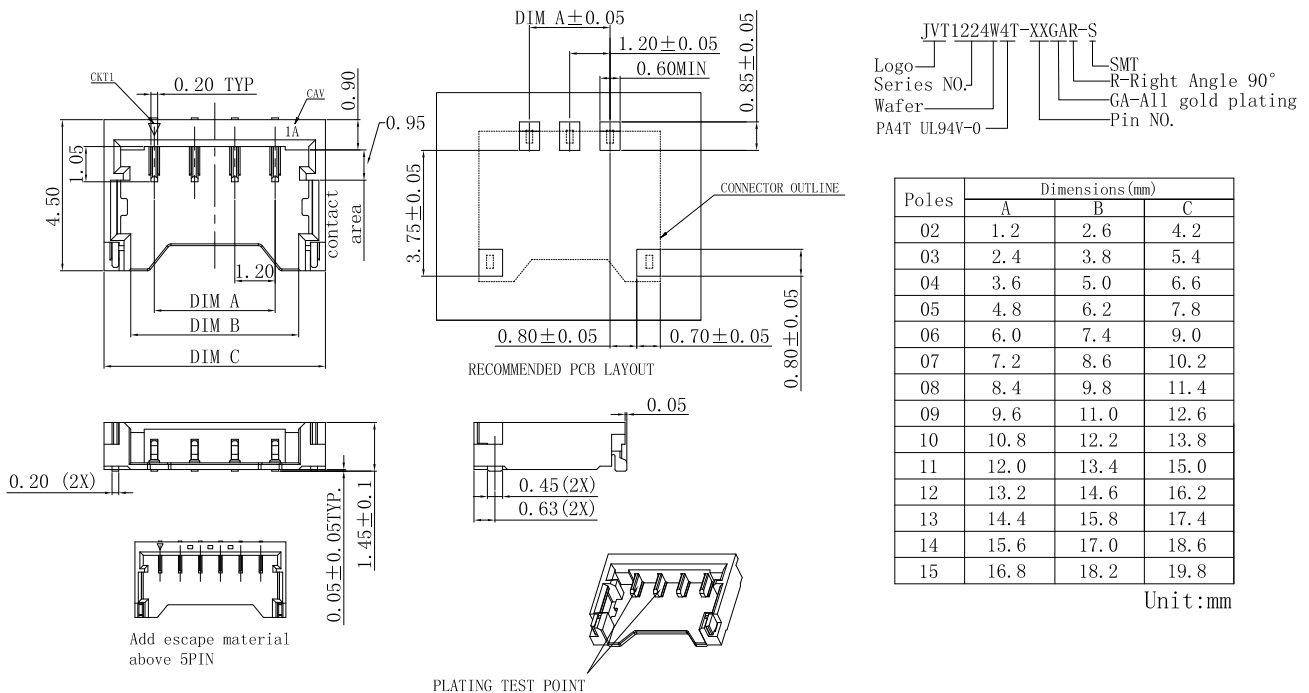

JVT1224W4T-XXGAR-S	PA4T UL94V-0	Brass	Gold Plated	Gold Plated	JVT1224 Housing
PART NO	Material	Material(Pin)	Finish(Pin)	Finish (Solder Tabs)	Mates With Part(s)