



RoHS







SPECIFICATION

- Voltage rating: 50V AC, DC
- Current Rating: 1A, AC, DC
- Withstand voltage: 250V AC/minute
- Contact resistance: 20mΩ max
- Insulation resistance: 100MΩ min
- Temperature range: -40° C ~ +105° C

WAFER




- Material: PA4T UL94V-0
- Color: Natural color
- Pin: Phosphor Bronze Tin-plated
- Contact: Brass Tin-plated
- Suitable JVT1005T series Terminal
- JVT1005H series Housing



JVT1005W4T-XXSWCL-S

Logo
Series NO.
Wafer
PA4T
Pin NO.

SMT
Lock
C-Cap
SW-Matte Tin
plating

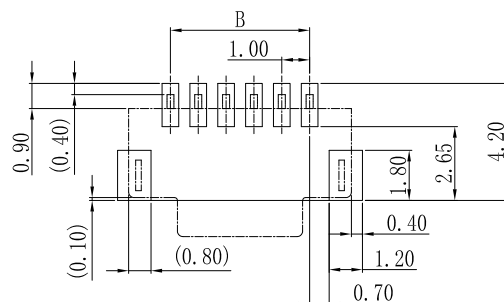

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
6	8.00	5.00	11	13.00	10.00
7	9.00	6.00	12	14.00	11.00
8	10.00	7.00	13	15.00	12.00
9	11.00	8.00	14	16.00	13.00
10	12.00	9.00	15	17.00	14.00

				GENERAL TOLERANCE	 乔业连接器 JVT CONNECTORS							
				0 ±0.35								
				.0 ±0.30								
				.00 ±0.20								
				.000 ±0.10								
Version	Content of change			Date	Signature		Unit	mm	Scale	1:1	Date	20221216